


Model: LM-133HDT-USB
13.3" Industrial Full HD Capacitive Touch Monitor



Main Feature

- LED Panel – Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 13.3" Full HD LED Panel support 1920x1080 pixels
- 10 point Capacitive Touch Screen
- NEMA4 / IP 65 compliant front panel, with Rugged construction design
- Aesthetic front bezel less for minimize stain water & dust
- Input signal : VGA + DVI + HDMI + USB (for Capacitive Touch Screen) + BNC + Audio
- OSD control keys to optimize the display
- AC 100-240V wide range external AC adapter (supporting Wide Range 8-24VDC input)
- Meet standard VESA hole (75x75 & 100X100mm), support desktop stand/wall mount /swing arm mounting
- Wide Range Operating Temperature -20 °C to 60 °C
- Application: Self-service Kiosk; Factory Automation, CCTV...

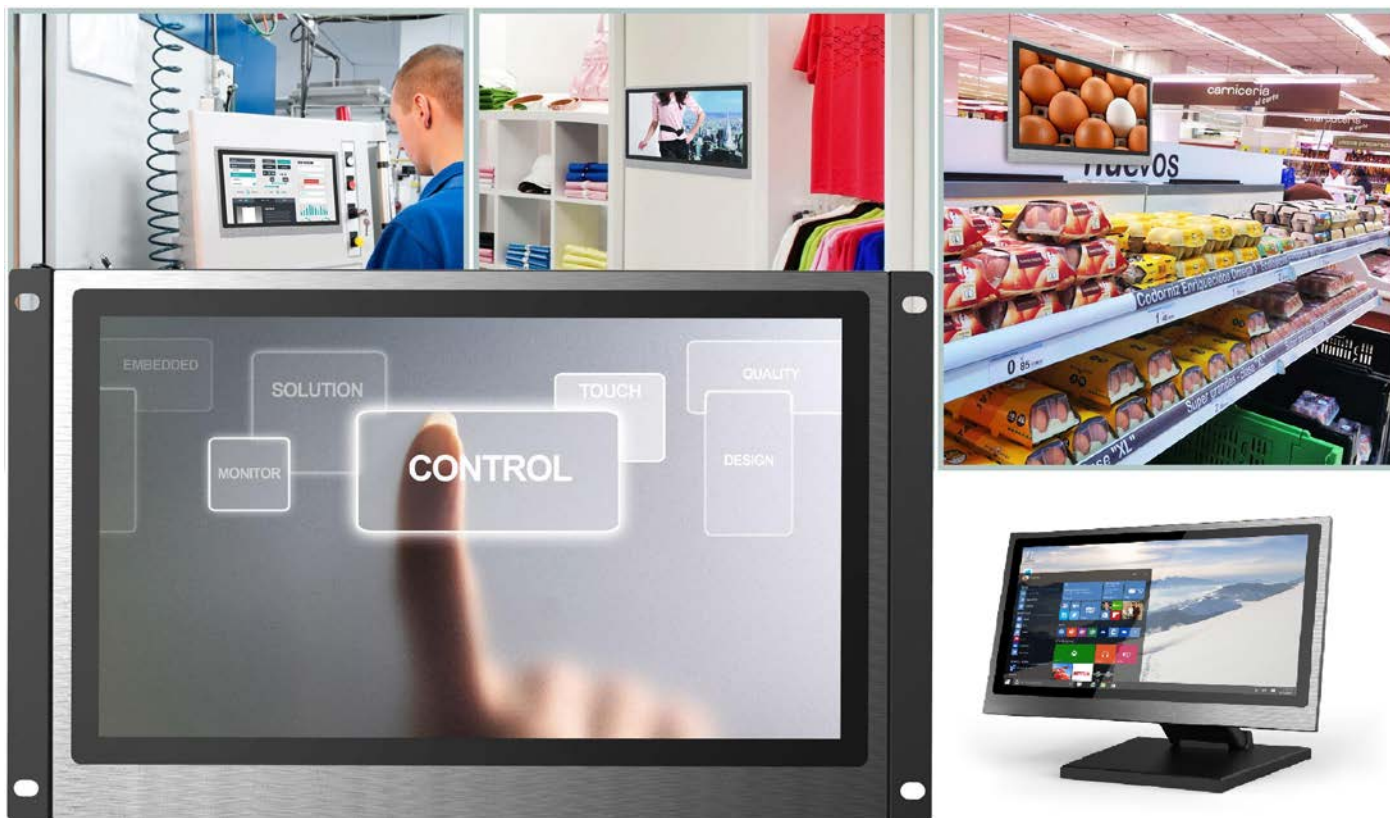

Specification	
Product Model	LM-133HDT-USB
LCD Panel	Display Type : 13.3" Full HD <u>LED Panel</u> Resolution : 1920 x 1080 Luminance : 300 cd/m2 View Angel : 170°(H), 170°(V)

	Contrast Ratio : 800 : 1 Response Time : 2 ms LED backlight lifecycle : 50,000hrs
Signal Input	VGA + DVI + HDMI + USB + BNC + Audio
OSD	Auto; Menu; Left; Right; Exit/Select; Power On/Off ...
Touch Screen	Internal USB interface controller – Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 6H Operation system : Window 7 / 8.1 / 10, Linux
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W, external AC power adapter
Construction	Aluminum magnesium alloy Frame with heavy-duty steel chassis
Environment	Operating temperature: -10 °C to 60 °C Storage temperature: -20 °C to 80 °C Storage humidity: 10% to 95%, non-condensing Vibration: 50 to 500HZ 1G PTP Shock: 10G /peak(11m sec)
Safety	CE/FCC/ROHS
Dimension W x H x D (mm)	334 x 220 x 35 mm

Structure Diagram

