


Model: RMF-19T
1U Foldable Rackmount 19" LCD, with Touch Screen

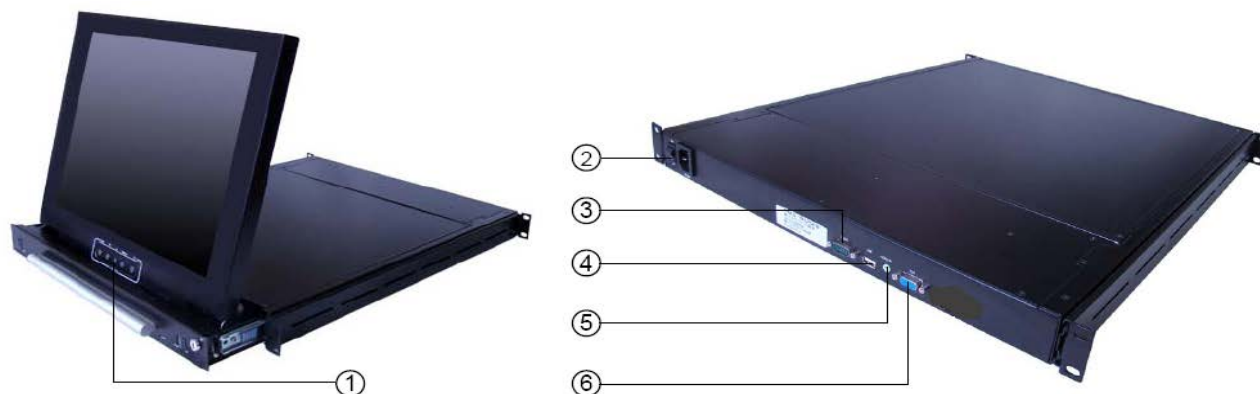

- | | | |
|-----------------|----------|-------------|
| 1. OSD Menu | 3. RS232 | 5. AUDIO IN |
| 2. Power Switch | 4. USB | 6. VGA |

Main Feature

- Foldable 1 U height rack-mounting design
- Construction: Heavy-duty steel
- Wide viewing angle
- OSD (On Screen Display) function
- Optional resistive touch screen function

Specification	
Product Model	RMF-19T
LCD Panel	Display Type : 19" SXGA TFT LCD Resolution : 1280×1024 Max. color : 16.7M Luminance : 300 cd/m ² View Angel : 178° (H) , 178° (V) Pixel Pitch : 0.294 x 0.294 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 23.25W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + Audio input (audio jack)
Front panel protection	Hardness Glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more

	Power consumption: <math><5V @1mA</math> Surface hardness : 3H Operating force : $\leq 100g$ Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
DC Power Input	Wide range DC 7V-28V input
Power Supply	Input: 100-240VAC, 50/60Hz
Construction	Heavy duty steel
Speaker	2x2W internal stereo speaker
Operation Temperature	0-50°C
Dimension W x H x D (mm)	Dimensions: 480 x 44.4 x 550mm

Structure Diagram Unit :mm

