


Model: RMM-15T
7U, 19" Rack mount 15" TFT LCD monitor, with Touch Screen

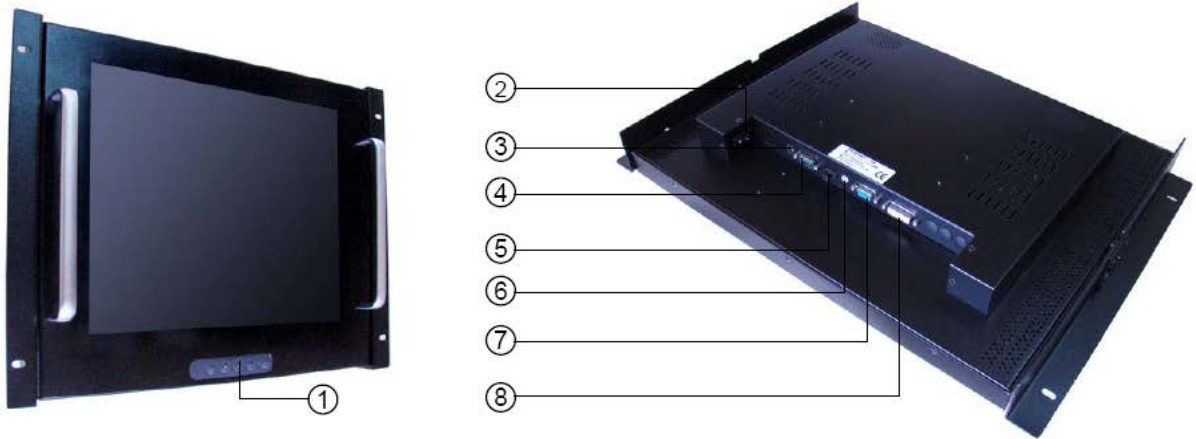

1. OSD button
 2. Power Switch

3. DC Jack
 4. TouchScreen COM Port

5. TouchScreen USB Port
 6. Audio-in

7. VGA-IN
 8. DVI-IN

Main Feature

- 7U, 19" Rack mount 15" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°

Specification	
Product Model	RMM-15T
LCD Panel	Display Type: 15" XGA TFT LCD Resolution : 1024×768 Max. color : 16.2M Luminance : 250 cd/m2 View Angel : 150°(H) , 135°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 700 : 1 Response Time : 8 ms Power Consumption : 11.27W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + DVI (DVI-D) + audio input (audio jack)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption: <5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux

Signal Connectivity (optional)	AV input (BNC)
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 480.8x311.15x60mm Packing Dimension: 620x440x195mm
Weight	NET weight: 8.5KG; Gross weight: 9KG

Ordering Information

RMM-15T	7U, 19" Rack mount 15" TFT LCD monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

Structure Diagram

Unit :mm

