


Model: RMM-17T
8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen

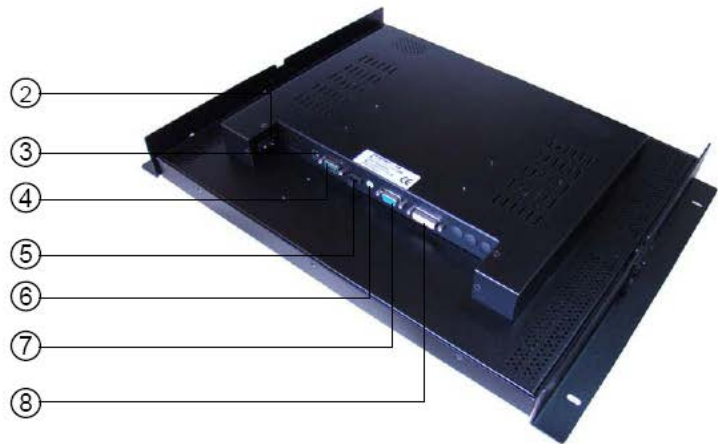

1. OSD button
 2. Power Switch

3. DC Jack
 4. TouchScreen COM Port

5. TouchScreen USB Port
 6. Audio-in

7. VGA-IN
 8. DVI-IN

Main Feature

- 8U, 19" Rack mount 17" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°


Specification	
Product Model	RMM-17T
LCD Panel	Display Type : 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + DVI (DVI-D) + audio input (audio jack)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity (optional)	AV input (BNC)

DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 482.6x355x60mm Packing Dimension: 610x490x195mm
Weight	NET weight: 8.2KG; Gross weight: 11KG

Ordering Information

RMM-17T	8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

Structure Diagram

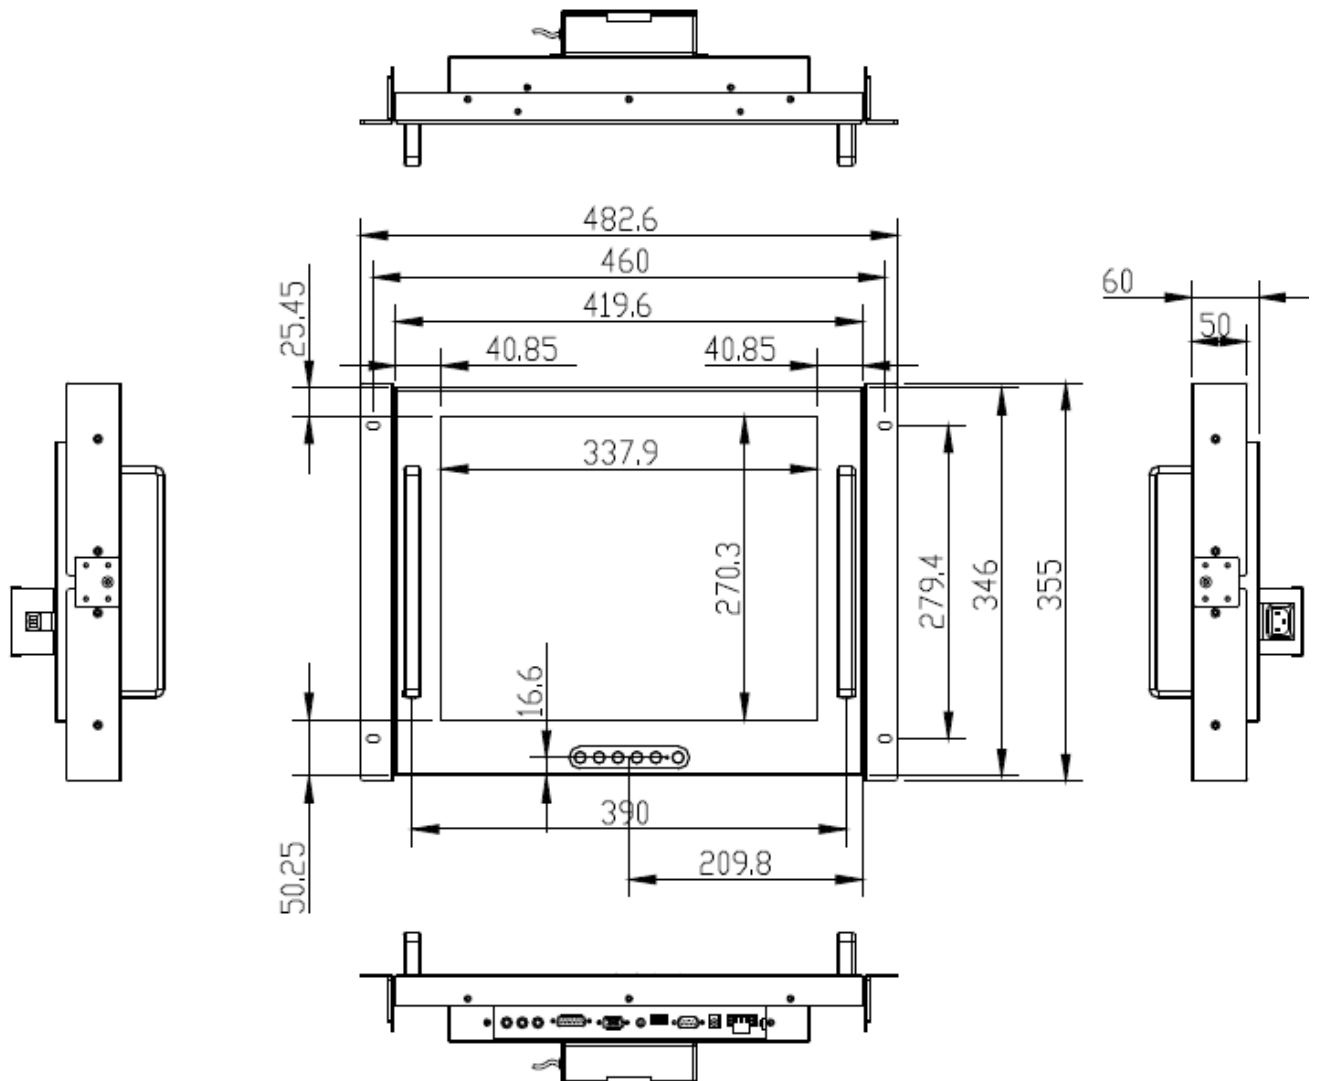

Unit :mm