



Model: 4U-IPC-4424

4U Server Case, 24 Hot-Swap SAS/SATA Drive Bay, MINI-SAS HD backplane (SFF-8643, Max. 12Gb/s)

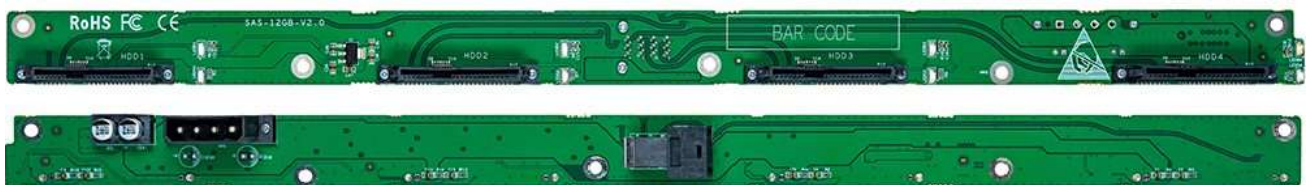

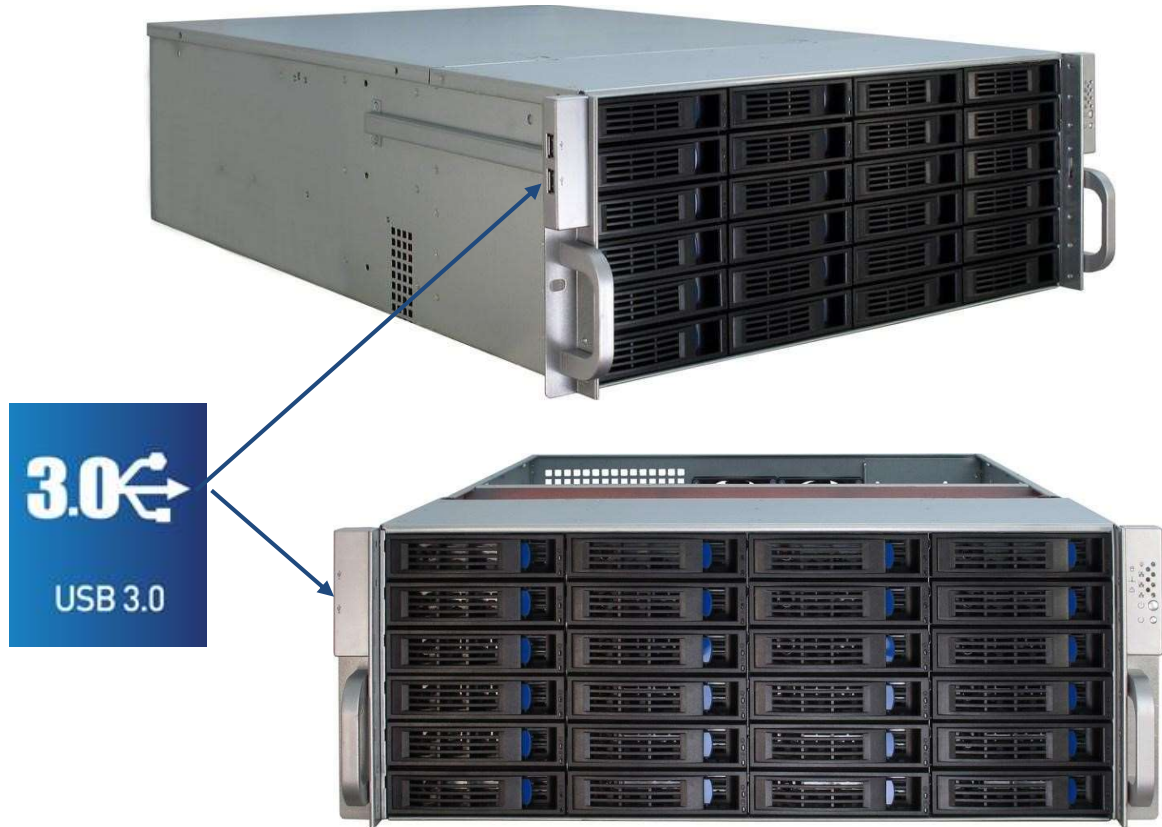

Specification

- **Form Factor:** 4U, 19" Rackmount Chassis
- **Color:** Silver and Black
- **Motherboard Support:** MINI-ITX (6.7" x 6.7"), Micro ATX (9.6" x 9.6"), ATX (12" x 9.6"), CEB (12" x 10.5"), EEB (12" x 13")
- **Processor Support:** Supports dual, single Intel® / AMD processors
- **Power Supply Support:** standard ATX, PS2 / Mini Redundant
- **Dimensions (H x W x D):** 178mm x 480mm x 690mm
- **Expansion Slots:** 7
- **Drive Bay:** 24 x 2.5" / 3.5" hot-swappable SAS/SATA trays, 2 x 2.5" or 1 x 3.5" bay for OS drive
- **Backplane:** 6 x SFF-8643 Mini SAS High Density connectors (Max. 12Gb/s)
- **Front Panel:** Power ON/OFF switch, System Reset switch, 2 x USB 3.0 port
- **Front LED:** 1 x Power ON, 1 x HDD activity, 3 x LAN activity, 2 x Alarm
- **System Cooling:** 3 x 120mm middle fans (Hot-swap type, Molex connector), 2 x 80mm rear fans
- **Material:** 1 - 1.2mm steel
- **Operating Temperature:** 0/50 °C
- **Storage Temperature:** -20/60 °C
- **Storage Humidity:** 10% to 90%, non-condensing
- **Packing:** Double Carton boxes, 250mm x 560mm x 830mm (H x W x D)
- **Weight:** 15.5 Kg(net), 18.5 Kg (gross)

Optional items

- Sliding Rail (For server rack depth 800 to 1000mm)
- Telescopic Sliding Rails For server rack depth 800 to 1200mm
- 650 to 1000 watt Power Supply Unit
- 500 to 800 watt Hot-swap Redundant Power Supply Unit