


Model: IDPO-10
10.4" flat fronted PCT touch Industrial grade monitor

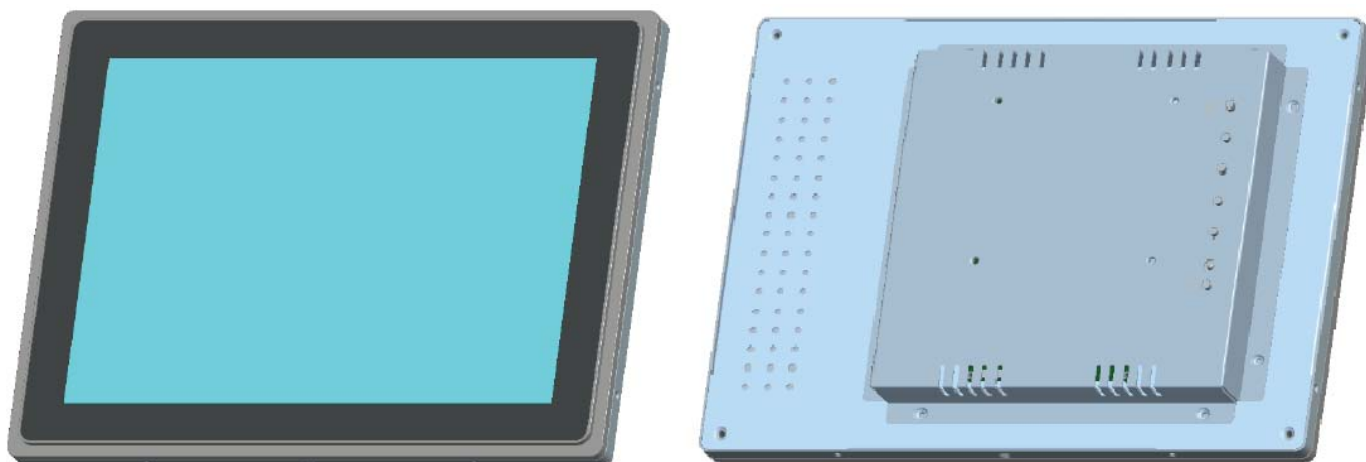

Main Feature

- LED Panel - Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 10.4" SVGA LED panel support 1024 x 768 pixels
- Wide operating temperature -10 to 70° C
- True flat surface , contemporary pro-flat style
- Front flat Anti-glare glass (6H Hardness) with projected capacitive Multi Touch Screen
- Supports 10 points multi-touch via USB interface in Windows XP/7/8.1/10, Linux, Android ...
- Open frame design, no additional enclosures or metalwork required
- Flexible signal interface: VGA & DVI-D
- Back VESA and four sides M4 screw mounting

Specification	
Product Model	IDPO-10
LCD Panel	Display Type : 10.4" (4:3 ratio) Resolution : 1024 x 768 Luminance : 350 nit View Angel : 150°(H), 150°(V) Maximum Color : 16.7M Contrast Ratio : 900 : 1 MTBF : 30,000hrs
Signal Input	VGA + DVI-D
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Auto and Source
Touch Screen	USB interface controller - Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 7H Operation system : Windows XP / 7 / 8.1 / 10; Linux; Android
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external AC adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: -10°C to 70°C Storage temperature: -20°C to 80°C

	Storage humidity: 10% to 95%, non-condensing Vibration: 5 to 500HZ 1G PTP Shock: 15G peak (11m second)
Dimension W x H x D (mm)	258 x 205 x 39
Ordering Information	
IDPO-10	10.4" flat fronted PCT touch Industrial grade monitor
Optional: DC	Support 9-36VDC Input

Structure Diagram (Unit mm)

