

**Model: KVM-1708COMBO-S, KVM-1716COMBO-S
1U 17" 8/16 Ports LCD Console Drawers**




Product advantage

1. 1U 17" LCD console drawer- Short Depth
2. 1280*1024, support DDC2B
3. Support mixed interface (PS/2 & USB) .
4. Provide the second set of ports for external display, keyboard and mouse as standby control
5. Support MS windows, Netware, Unix, Linux
6. Support iMAC, Power MAC and Sun Micro system with USB connection
7. Support automatic port scanning and scanning interval 5~99S
8. The built-in power saving switch can prolong the service life of the display screen
9. Pulling installation, ultra short depth design
10. No software is needed. Select computer via OSD menu, button and hotkey
11. Provide access control list, capable of saving 8 independent user accounts
12. Support hot plug & play --- computer can be removed without having to shutdown the LCD console.
13. Support two user levels, capable of searching computer/server name.
14. Can save keyboard status information when switching computer.
15. Provide multiple hotkeys(Scroll-Lock/ Cap-Lock/ Num-Lock/ L-Alt/ L-Ctrl/ L-Win/ R-Alt/ R-Ctrl/R-Win)
16. Support daisy-chained connection (8 levels) and stacking cascade connection (2 levels).

Specification			
Product Model		KVM-1708COMBO-S	KVM-1716COMBO-S
LCD	Size	17" TFT LCD	
	Resolution	1280 x 1024 DDC2B	
	colors	16.7 M	
	brightness	250 cd/m2	
	Contrast ratio	1000: 1	
LED	Power led	2	
	Switch led	8	16
	Online led	8	16
	Num lock	1	
	Cap lock	1	
	Scroll lock	1	
Console	Keyboard/Mouse	1 x USB-A front , 2 x USB-A rear	
	video	1 x HDB-15	
PC/Server	Keyboard/Mouse	PS/2 or USB-A	
	video	8x HDB-15	16x HDB-15
	distance	PS/2 cable can reach 15m, USB cable can reach 10m (standard 1.8m, optional 3/5/10m)	
Keyboard/Mouse		95-key keyboard with touchpad	
Switching mode		Hotkeys, panel keys, OSD menus	
Hotkey		Scroll-Lock/ Cap-Lock/ Num-Lock/ L-Alt/ L-Ctrl/ L-Win/ R-Alt/ R-Ctrl/R-Win	

Up to PC	512	1024
Input voltage	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Housing	Metal and Plastic handle	
Space	1U , 19 inch rack	
Colour	Black	
Net weight/gross weight (KG):	14.5kg / 19kg	14.5kg / 19kg
Product (D x W x H):	450 x 465 x 44 (mm)	
Packing (D x W x H):	720 x 590 x 170(mm)	
Operating temp.	0 to 55° C degree	
Storage temp.	-20 to 60° C degree	
Operating humidity	10 - 90%, non-condensing	
Authentication	CE/FCC	

Connection Diagram

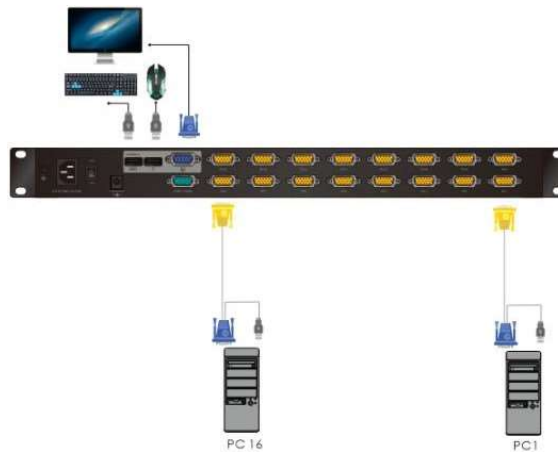

Dimension Diagram

