


Model: RMM-19  
8.5U, 19" Rack mount 19" TFT LCD monitor

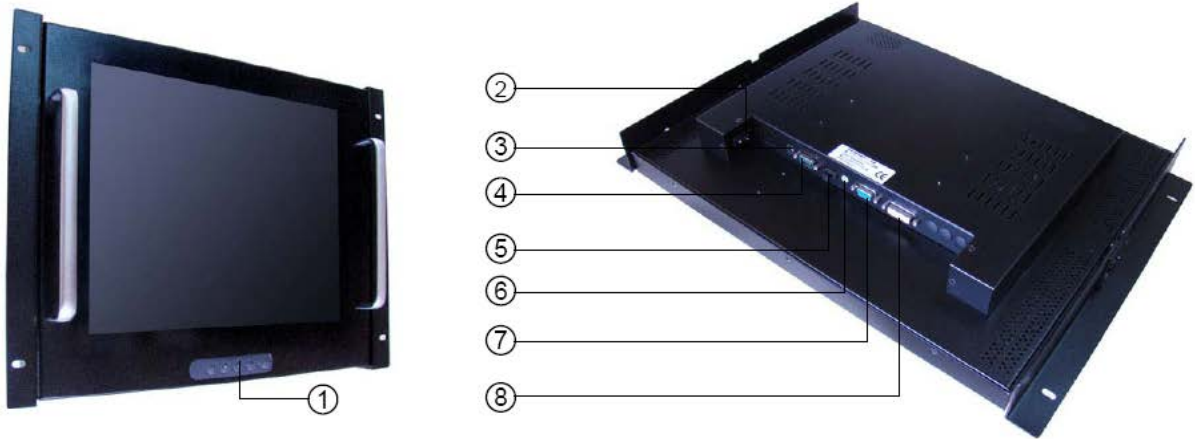

1. OSD button  
2. Power Switch

3. DC Jack  
4. TouchScreen COM Port

5. TouchScreen USB Port  
6. Audio-in

7. VGA-IN  
8. DVI-IN

## Main Feature

- 8.5U, 19" Rack mount 19" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°

Specification	
Product Model	RMM-19
LCD Panel	Display Type : 19" SXGA TFT LCD Resolution : 1280×1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.294 x 0.294 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 23.25W LCD MTBF : 50,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Signal Connectivity ( optional )	AV input (BNC)
DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing

	Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 482.6x377x 60mm Packing Dimension: 610x510x195mm
Weight	NET weight: 9.2KG Gross weight: 12KG

## Ordering Information

RMM-19	8.5U, 19" Rack mount 19" TFT LCD monitor
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

## Structure Diagram

Unit :mm

