


Model: RMM-2X8-SDI
 1U, 8 X 2" TFT LCD Rack Mount Monitor with SDI Input and Output

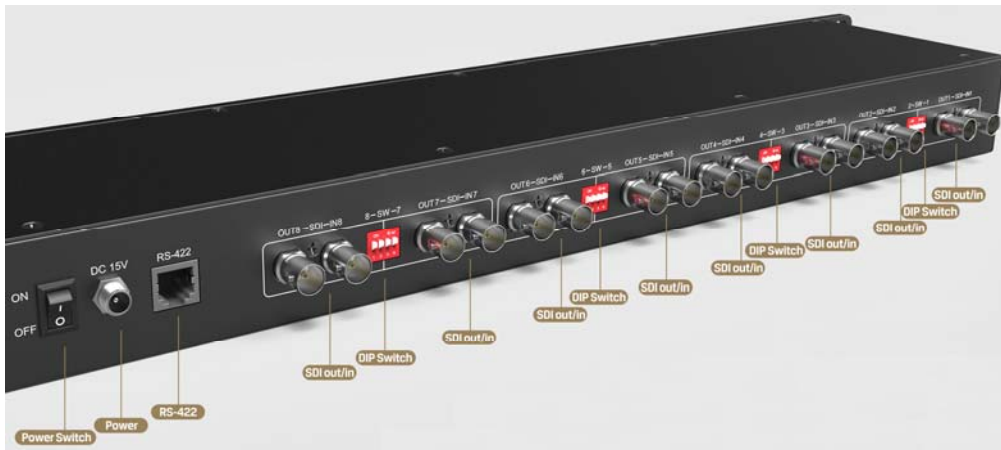

Main Feature

- 1U, 19" Rack Mount 8 x 2" TFT LCD Monitor
- Full 1080p HD resolution (1920 x 1080)
- Inputs: 3G-SDI, RS422
- Output: 3G-SDI
- 3G-SDI supports 1080p and lower
- Monitor and Control via RS422
- Front-access OSD Controls

Specification	
Product Model	RMM-2X8-SDI
LCD Panel	Display Type : 2" TFT LED Panel LCD Resolution : 640 x 240 Luminance : 250 nit Contrast: 300:1 View Angel : 80° (H), 70° (V)

Signal Input	3G-SDI x8 + RS422
Signal Output	3G-SDI x8
Power Supply	DC15V@ 2.5A /38W, External AC adapter (12-24VDC Wide range input)
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F~113 °F (0 °C to 45 °C) Storage temperature: -4 °F~140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 482x105x44mm Packing Dimension: 600x190x 120mm
Weight	NET weight: 1.6KG Gross weight: 2.5KG
Ordering Information	
RMM-2X8-SDI	1U, 8 X 2" TFT LCD Rack Mount Monitor with SDI Input and Output

Structure Diagram Unit :mm

