


**Model: SLR-15T**  
**15" Sunlight Readable Industrial Display with Resistive Touch**

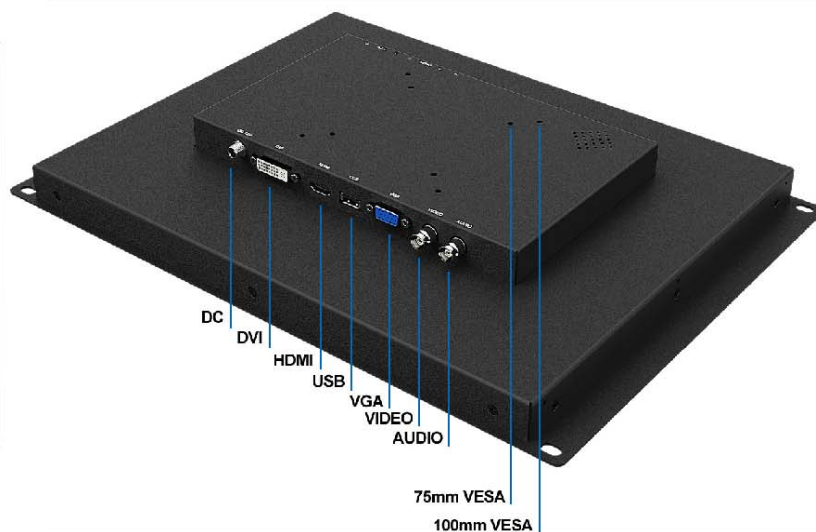

### Main Feature

- LED Panel - Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 7" WVGA LED panel support 800x480 pixels
- Front 4mm Aluminum bezel with NEMA4 / IP 65 compliance
- Front flat glass (6H Hardness) with projected capacitive Multi Touch Screen
- Supports 10 points multi-touch via USB interface in Windows 7/8.1/10/11 ...
- Slim design for Panel mount easy installation
- Input signal : VGA + HDMI + AV(BNC) + Audio + USB
- AC 100-240V wide range external AC adapter (with Wide Range 12-24VDC input)

### Application

Kiosk; Digital Signage; Factory Automation; Processor Automation; Marine / Offshore Industrial ...

Specification	
Product Model	SLR-15T
LCD Panel	Display Type : 15" XGA LED Panel Resolution : 1024 x 768 Max. color : 16.7M Luminance : 1,000 nit View Angel : 170° (H), 170° (V) Contrast Ratio : 1500 : 1 LED backlight lifecycle: 50,000hrs
Signal Input	VGA + DVI + HDMI + AV (BNC) + Audio (BNC) + USB
OSD	Auto; Menu; Left; Right; Exit/Select; Power On/Off
Touch Screen	Internal USB - <u>industrial grade 5 wire Resistive Touch controller</u> Resolution: 4096 x 4096 Light transmission: 80% or more Surface hardness : 3H Operating force : ≤100g

	Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / 10 / 11, CE, DOS , Linux
Power Supply	Input: 7-24VDC Wide-range AC power to DC Adapter: 100-240VAC,50/60Hz to DC12V/2A
Construction	Heavy-duty steel chassis
Environment	Operating temperature: --20 °C to 60 °C Storage temperature: -30 °C to 70 °C Storage humidity: 10% to 95%, non-condensing Vibration: 50 to 500HZ 1G PTP Shock: 10G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	402 x 289 x 45 mm
Ordering Information	
SLR-15T	15" Sunlight Readable Industrial Display with Resistive Touch

## Structure Diagram

